

A Series Floor Standing Server Rack



Model No.:AS

Standard:

- Comply with ANSI/EIA RS-310-D, DIN41497 part 1, IEC297-2, DIN41494 part 7, GB/T3047.2-92 standard. Compatible with 19 inch international standard.

Front & Rear Door Feature:

- Toughened glass front door with symmetrical strip-type vented hold border
- Hexagonal reticular high-density vented plate rear door
- Front & rear door with handle lock
- Front door can be designed to open in left or right
- Rear door can be changed to double-door

Material:

- SPCC Cold Rolled Steel
- Thickness: 2.0mm-1.2mm-1.0mm

Surface Finish:

- Degreasing, pickling, phosphating, powder coating

Loading Capacity:

- Static loading: 800KG

Degree of Protection:

- IP20

A Series Floor Standing Server Rack



Model No.:A3

Standard:

- Comply with ANSI/EIA RS-310-D, DIN41497 part 1, IEC297-2, DIN41494 part 7, GB/T3047.2-92 standard. Compatible with 19 inch international standard.

Front & Rear Door Feature:

- Hexagonal reticular high-density vented plate front door
- Hexagonal reticular high-density vented plate rear door
- The ventilated rate is 75%
- Front & rear door with handle lock
- Front door can be designed to open in left or right
- Rear door can be changed to double-door

Material:

- SPCC Cold Rolled Steel
- Thickness: 2.0mm-1.2mm-1.0mm

Surface Finish:

- Degreasing, pickling, phosphating, powder coating


Loading capacity:

- Static loading: 800KG

Degree of protection:

- IP20

A Series Floor Standing Server Rack

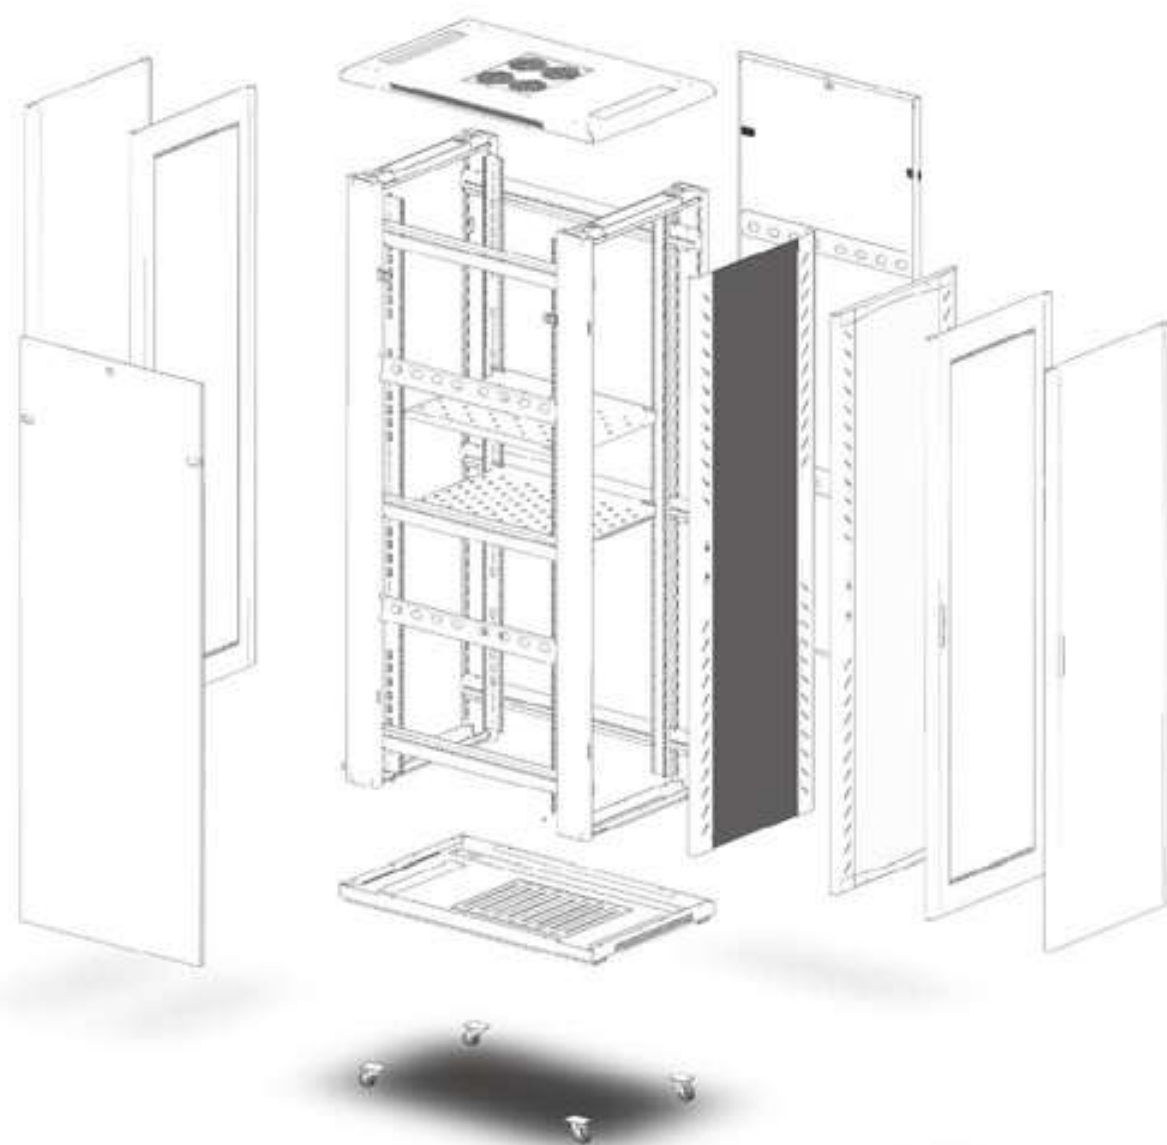

Main Parts:

S/N	Specification	Quantity	Unit	Material	Surface Finish	Remark
1	Frame	2	Piece	SPCC cold rolled steel t1.0	Powder coated	
2	Side panel	2	Piece	SPCC cold rolled steel t1.0	Powder coated	
3	Top cover	1	Piece	SPCC cold rolled steel t1.2	Powder coated	
4	Bottom panel	1	Piece	SPCC cold rolled steel t1.2	Powder coated	
5	Mounting profile	4	Piece	SPCC cold rolled steel t2.0	Zinc plated	
6	Mounting rail	4/6	Piece	SPCC cold rolled steel t1.2	Powder coated	
7	Front door	7	Piece	5MM toughened glass door/SPCC t1.2	Powder coated	
8	Back door	1	Piece	Single open mesh vented door t1.2	Powder coated	
9	Castors	4	Piece			
10	Leveling feet	4	Piece			
11	Lock	2	Piece			with 2 keys
12	M6 Square nut	20	Piece	Steel	Color Zinc	
13	M6 B-head screw	20	Piece	Steel	Color Zinc	
14	Allen wrench	1	Piece	Steel	Color Zinc	

A Series Floor Standing Server Rack

Specification:

Model No.	Capacity (U)	Width (mm)	Depth (mm)	Height (mm)	Volume (CBM)	Accessories(Optional)
AS.6618	18	600	600	987	0.131	2 fans + 1 shelf
AS.6818			800		0.152	4 fans + 1 shelf
AS.6018			1000		0.182	4 fans + 1 shelf
AS.8818		800	800		0.212	4 fans + 1 shelf
AS.8018			1000		0.240	4 fans + 1 shelf
AS.6622	22	600	600	1164	0.146	2 fans + 1 shelf
AS.6822			800		0.169	4 fans + 1 shelf
AS.6022			1000		0.202	4 fans + 1 shelf
AS.8822		800	800		0.238	4 fans + 1 shelf
AS.8022			1000		0.267	4 fans + 1 shelf
AS.6627	27	600	600	1387	0.166	2 fans + 1 shelf
AS.6827			800		0.189	4 fans + 1 shelf
AS.6027			1000		0.227	4 fans + 1 shelf
AS.8827		800	800		0.268	4 fans + 1 shelf
AS.8027			1000		0.299	4 fans + 1 shelf
AS.6632	32	600	600	1609	0.186	2 fans + 1 shelf
AS.6832			800		0.211	4 fans + 1 shelf
AS.6032			1000		0.252	4 fans + 1 shelf
AS.8832		800	800		0.301	4 fans + 1 shelf
AS.8032			1000		0.333	4 fans + 1 shelf
AS.6637	37	600	600	1832	0.229	2 fans + 1 shelf
AS.6837			800		0.265	4 fans + 1 shelf
AS.6037			1000		0.315	4 fans + 1 shelf
AS.8837		800	800		0.364	4 fans + 1 shelf
AS.8037			1000		0.405	4 fans + 1 shelf
AS.6642	42	600	600	2054	0.248	2 fans + 1 shelf
AS.6842			800		0.285	4 fans + 1 shelf
AS.6042			1000		0.339	4 fans + 1 shelf
AS.8842		800	800		0.394	4 fans + 1 shelf
AS.8042			1000		0.437	4 fans + 1 shelf
AS.6647	47	600	600	2276	0.291	2 fans + 1 shelf
AS.6847			800		0.339	4 fans + 1 shelf
AS.6047			1000		0.402	4 fans + 1 shelf
AS.8847		800	800		0.457	4 fans + 1 shelf
AS.8047			1000		0.509	4 fans + 1 shelf