
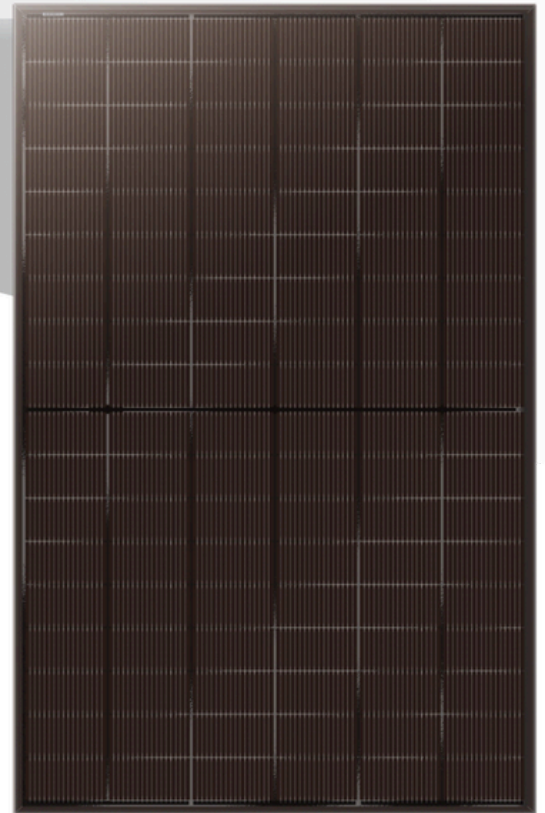


# Black Jade-Flow

DOUBLE-TRANSPARENT GLASS BIFACIAL N-TYPE MODULE

## 445~455 W

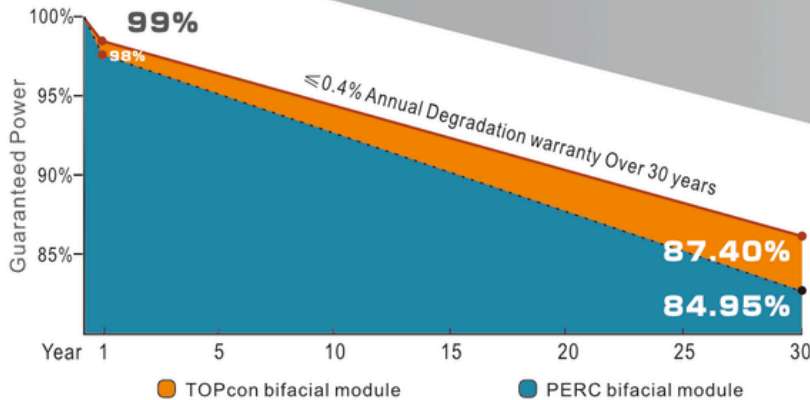

**Cutting Free Technology**  
Minimized micro-crack



**Bifacial Mono Module**  
Capable of generating power at back side, at least 80% efficiency of the front side



**Anti-PID (potential induced degradation)**  
Passed anti-PID test under 85°C damp heat 85% relative humidity for 192 hours



**Lower LCOE**  
Lower shading and resistive loss  
Lower temperature coefficient



**Outstanding mechanical load resistance**  
2400 Pa wind load, 5400 Pa snow load



15-year product warranty  
30-year linear power output



CEC Listed



IEC 61215, IEC 61730

ISO 9001: 2015 (Quality management systems)

ISO 14001: 2015 (Environmental management systems)

ISO 45001: 2018 (Occupational health and safety)

UNI 9177 la CLASSE DI REAZIONE AL FUOCO:1



Add: No. 238 Yunlin Middle Road, Wangchun Industrial District, Ningbo China

Tel: +86-574-28828939

Email: sales@ulsolar.com.cn

Fax: +86-574-28828997

Web: www.ulicasolar.com

# TOPCon(N TYPE) 445~455Watt

## ELECTRICAL SPECIFICATIONS



Module Type	UL-445M-108BDGN		UL-450M-108BDGN**		UL-455M-108BDGN		
	STC*	NOCT*	STC*	NOCT*	STC*	NOCT*	
Maximum Power (Pmax)	W	445	337	450	341	455	345
Maximum Power Voltage (Vmp)	V	33.02	30.38	33.22	30.56	33.42	30.75
Maximum Power Current (Imp)	A	13.48	11.10	13.55	11.16	13.61	11.21
Open-circuit Voltage (Voc)	V	39.58	36.02	39.78	36.20	39.98	36.38
Short-circuit Current (Isc)	A	14.30	11.53	14.38	11.60	14.45	11.66
Module Efficiency STC	%	22.27		22.52		22.77	
Operating Temperature	-40°C~85°C						
Maximum system voltage	DC1500V(IEC)						
Maximum series fuse rating	30A						
Power tolerance	0~+5Watt						
Temperature coefficients of Pmax	-0.29%/°C						
Temperature coefficients of Voc	-0.25%/°C						
Temperature coefficients of Isc	0.046%/°C						
Nominal operating cell temperature (NOCT)	43±2°C						

\*STC : Cell temperature: 25°C, Irradiance: 1000 W/m<sup>2</sup>, Air mass: 1.5G


\*\*NOCT: Air temperature: 20°C, Irradiance: 800 W/m<sup>2</sup>, Air mass: 1.5G, Wind speed: 1 m/s

## I-V CURVE

I-V characteristics at different irradiances (reference to 450W)

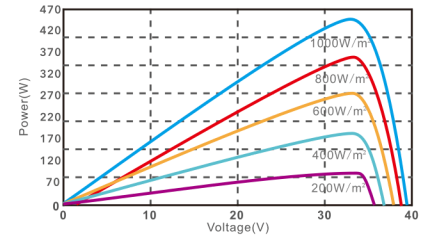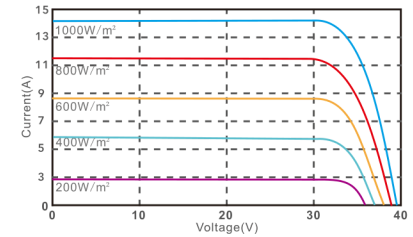

I-V characteristics at different temperature

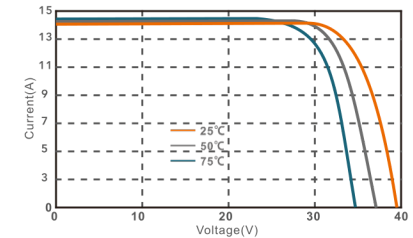


## SPECIFICATIONS

Cell Type	N type Mono-crystalline	
No. of cells	108(6×9×2)	
Dimensions	1762*1134*30mm	
Weight	24.0kg	
Glass	2.0mm+2.0mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass	
Junction Box	IP68, 3 diodes	
Connector	MC4 Compatible	
Cable Length (Including Connector)	4mm <sup>2</sup> Landscape: (+)1200mm/(-)1200mm or Customized Length	
Packaging Configuration	Two Box=One Pallet 36pcs/Box, 72pcs/Pallet, 936pcs/40HQ Container	

\*\* Notice: "BDGN" model has Black frame, "DGN" model has classic/alu-silver frame

## Electrical characteristics with different rear side power gain (reference to 450W front)

Pmax/W	Voc/V	Isc/A	Vmp/V	Imp/A	Pmax gain
450	39.78	14.38	33.22	13.55	0%
473	39.78	15.10	33.22	14.22	5%
495	39.78	15.82	33.22	14.90	10%
518	39.78	16.54	33.22	15.58	15%
540	39.78	17.26	33.22	16.26	20%
563	39.78	17.98	33.22	16.93	25%
585	39.78	18.69	33.22	17.61	30%

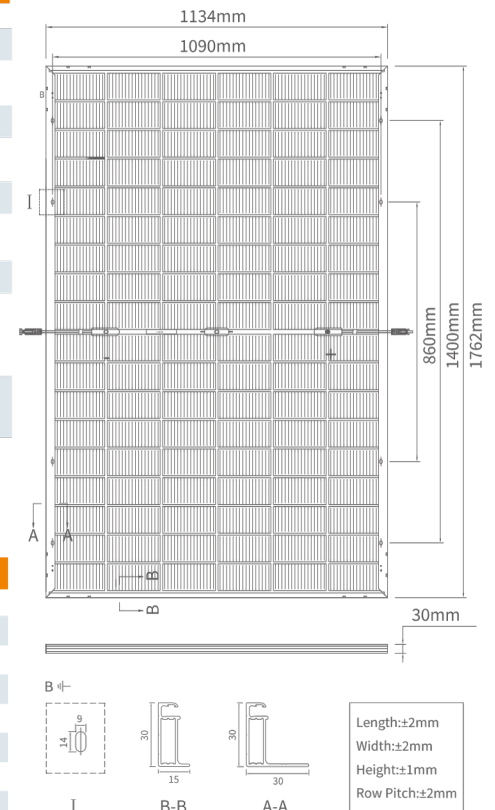

Specifications included in this datasheet are subject to change without notice.

Ulica Solar reserves the right of final interpretation.

Version No.: UL-1762-108BDGNTHC-30-EN-V1.2