



## Reolink Innovation Limited

### Picture



### Model

### Argus Series B320

### Video & Audio

Image Sensor	1/2.7" CMOS Sensor
Video Resolution	2304 x 1296 (3.0Megapixel) at 15 frames/sec
Video Format	H.264
Field of View	Fixed lens, 115° diagonal
Infrared Night Vision	up to 10 Meters (33ft) (LED: 6pcs/14mil/850nm)
Digital Zoom	10x digital zoom
Audio	two-way audio

### PIR Detection & Alerts

Smart Alarm	PIR detection/Human Detection/Vehicle Detection
PIR Detecting Distance	Adjustable up to 10 m (33 ft)
PIR Detecting Angle	100° horizontal
Audio Alert	Customized verbal alerts
Recording	Motion Triggered Recording
Other Alerts	Instant email alerts and push notifications

### Wireless

Operating Frequency	2.4GHz
Wireless Standard	IEEE 802.11b/g/n
Wireless Security	WPA-PSK/WPA2-PSK

### Power

Battery	4800mAh rechargeable battery (Battery life varies based on settings, usage & temperature)
Solar	Reolink Solar Panel
DC Power	5V/2A USB power adaptor

### Storage

Local Storage	Supports up to 128GB micro SD card
Cloud Storage	Supports Reolink Cloud

### Working Environment

Operating Temperature	-10 to 55° C (14° to 131° F)
Weather Resistance	IP65 Weatherproof

### Size & Weight

Size	Φ 71 x 191mm
Weight (Battery included)	339g

### Warranty

Limited Warranty

2-year limited warranty. For support, visit  
<https://support.reolink.com/hc/en-us/>




Shenzhen Reolink Technology Co., Ltd.

<http://www.reolink.com>

Tel: 86-755-8653 9985 Fax: 0086-755- 8619 9531

Picture

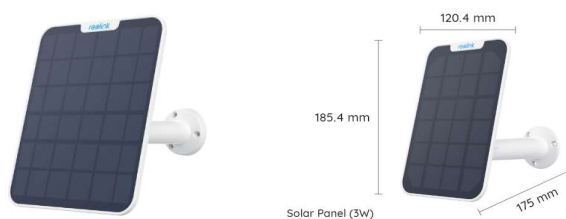

Model	Name	Reolink Solar Panel
Size & Weight	Dimensions	185.4 x 120.4 x 6.5(mm)
	Cable Length	4 meters
	Weight	280g
	Interface	USB Type-C
Electrical Parameters	Max. Voltage	6.0V
	Max. Current	530mA
	Max. Power	3.2W
Other	Working Temperature	-10°C~+55°C (14°F~131°F)
	Working Humidity	10%~90%
	Waterproof	IP65