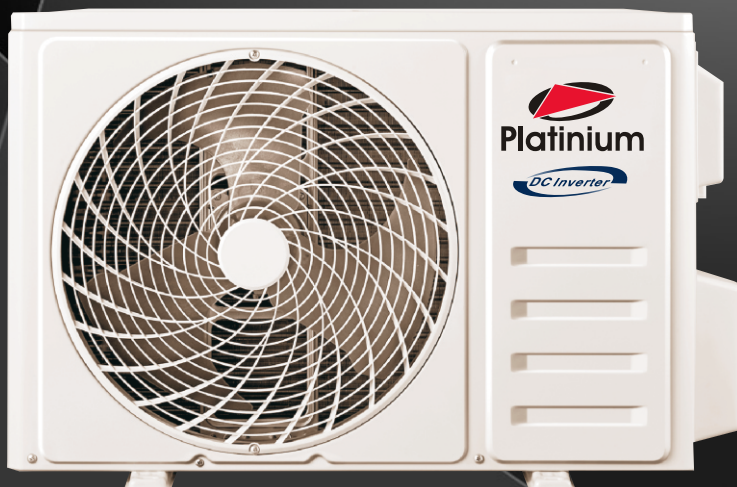
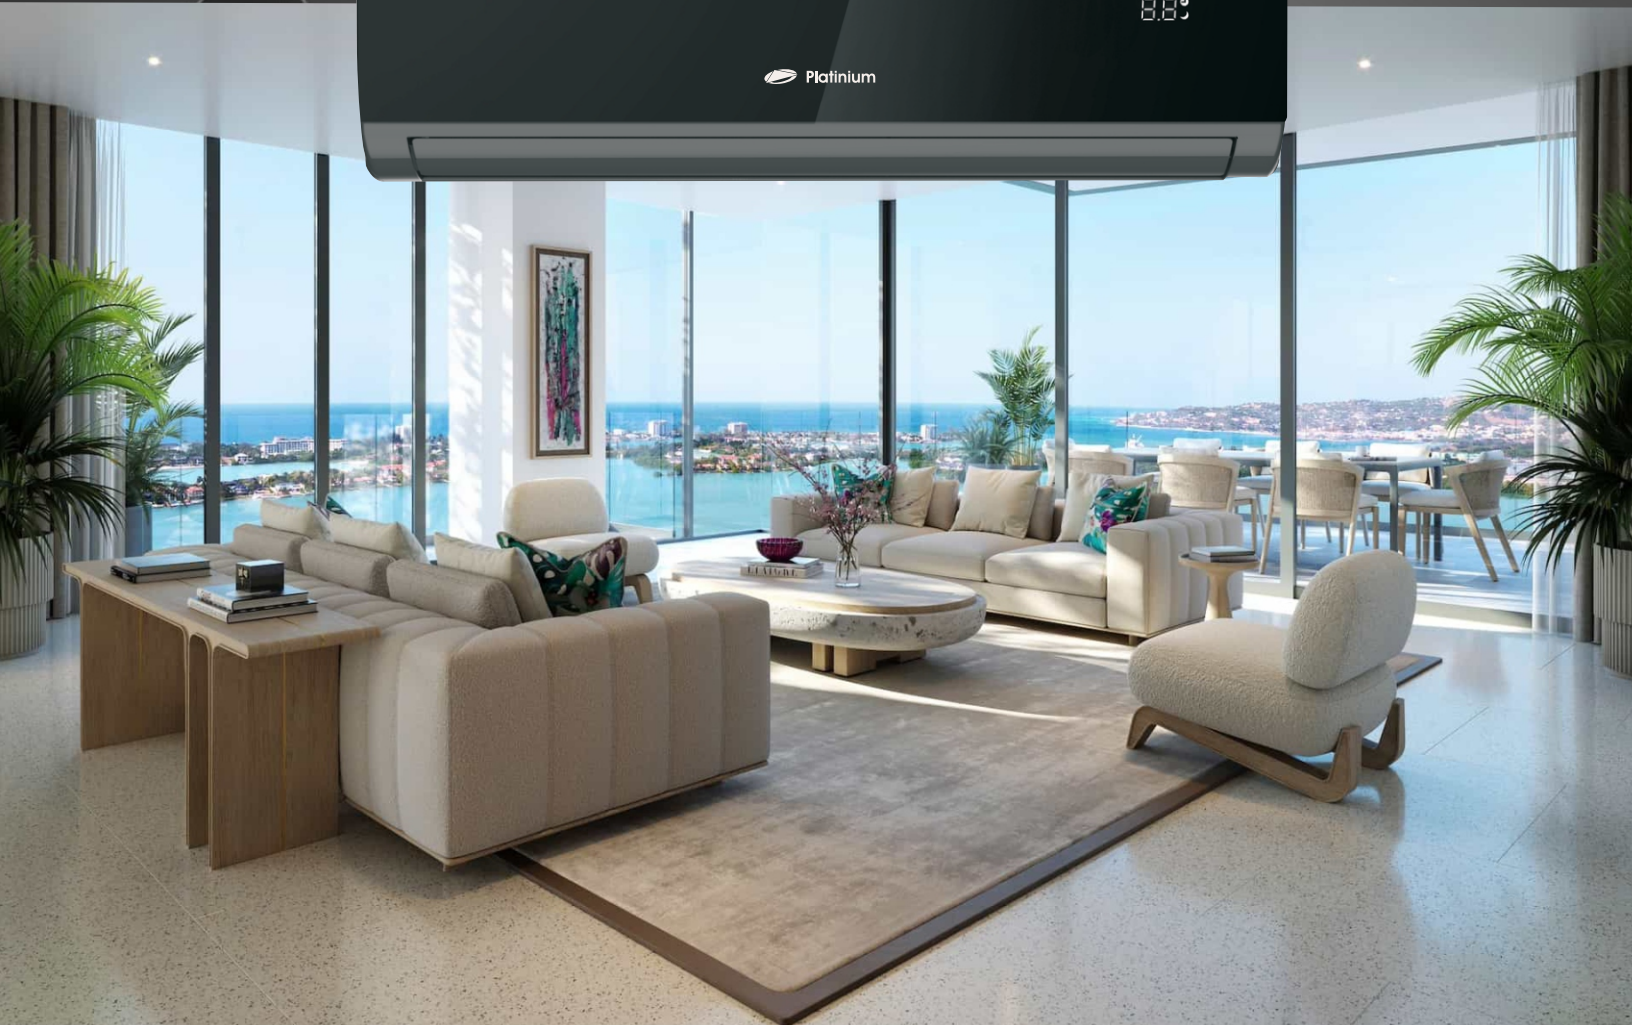


Aer conditionat



Platinum

BLACK



A++



ECO FUNCTION

I feel

WI-FI



Model			PWIFI -12R32++BM	PWIFI -18R32++BM
			R32 12000Btu	R32 18000Btu
Capacitate racire		W	3400(1000~3770)	5100(1250-5910)
Capacitate incalzire		W	3420(1000~3810)	5100(1250-6070)
SEER			6.1	6.1
Clasa energetica pt racire			A++	A++
SCOP			4.0	4.0
Clasa energetica pt incalzire			A+	A+
Consum anual	Racire	kWh	195	293
	Incalzire	kWh	735	1330
Capacitate dezumidificare		L/h	1.2	1.5
Nivel zgomot unitate interioara	(T,H,M,L,Mute)	dB(A)	50/47/43/35/32	53/50/47/43/36
Nivel zgomot unitate exterioara		dB(A)	60	65
Presiune sunet unitate interioara	(T,H,M,L,Mute)	dB(A)	40/37/33/25/22	43/41/38//35/27
Presiune sunet unitate exterioara		dB(A)	50	55
Date electrice				
Alimentare			220-240V~/50Hz/1P	220-240V~/50Hz/1P
Curent de operare	Racire	A	5.8(1.5~9.0)	8.1(1.7~12.0)
Curent de operare	Incalzire	A	5.1(1.5~10.0)	7.0(1.7~13.0)
Putere consumata	Racire	W	1130(290~1500)	1580(330~2340)
Putere consumata	Incalzire	W	1005(290~1720)	1374(340~2520)
Sistem de refrigerare				
Tip refrigerant / Incarcare			R32/0.49kg	R32/1kg
Compresor	Type		Rotary	Rotary
	MFG		RECHI	GMCC
Volum aer interior		m3/h	550	800
Volum aer exterior		m3/h	1700	2600
Dispozitiv expansiune			Capilar	Capilar
Tevi Conexiune	Gaz	Inch	3/8"	3/8"
	Lichid	Inch	1/4"	1/4"
Altele				
Aria aplicabila		m²	14~22	20~35
Lungime maxima traseu		m	25	25
Diferenta max de inaltime		m	10	10
Temperatura ambient (Racire / Incalzire)	Exterior	grd C	Rac :-15~53/Inc :-20~30	Rac :-15~53/Inc :-20~30
	Interior	grd C	Rac: 17~32/Inc: 0~30	Rac:17~32/Inc:0-30
Dimensiuni nete (W x H x D)	Interior	mm	777×250×201	910×294×206
	Exterior	mm	712×459×276	853×602×349
Greutate neta	Interior	kg	7.5	10
	Exterior	kg	22	31



Clean

Funcție
I set

LED
display