
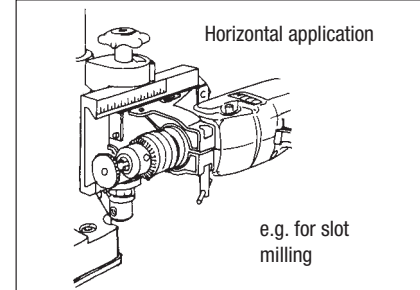
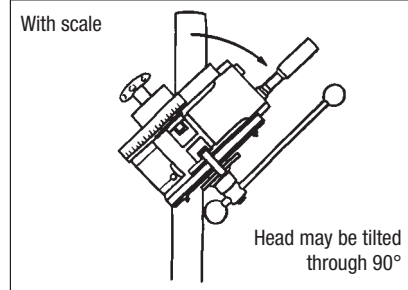


Mill/drill unit BFB 2000


For standard drills with 43mm spindle neck.

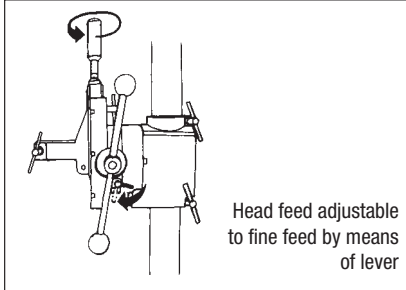


Head with precision milled dovetail slide and may be tilted through 90° to give all-round versatility: diagonal drilling, versatile without need of special milling bits, milling diagonal slots. Fine feed selectable, allowing fine head feed for milling. With dial and depth scale. Geared rack and pinion feed for effortless drilling. 45mm diameter drill column, 500mm long. Approx. 140mm throat (column outside to tool centre). 65mm stroke. Machined, solid base plate approx. 200 x 200mm. All drills with standard 43mm spindle collars may be utilised directly: BOSCH, AEG, FEIN, METABO, KRESS, BLACK & DECKER, SKIL. Weight approx. 6.5kg.
NO 20 000

HSS milling cutter set (2 - 5mm) Ideal for mill/drill system BFW 40/E

HSS, all with 6 mm cylindrical shaft. Consists of cutters of 2, 3, 4 and 5mm diameter. Double fluted, according to DIN 327. Made of HSS. Supplied in wooden box with sliding lid.
NO 24 610



Steel step clamp set

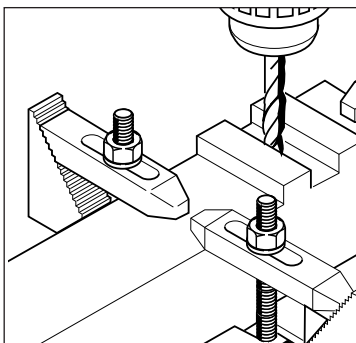

Consists of 2 step blocks and 2 clamps, 2 nuts, 2 T-slot nuts. For securing objects to approx. 35 mm high. May be used with compound table KT 150 and millers PF 400 and FF 400. Neatly packed in a wooden box with sliding lid.

NO 24 257

For more accessories, see page 53!

